

CJ3000+PTC-EM3


DC Locomotive Voltage Absence Detector

Description

Measures the voltage of the installation and activates three potential-free switching contacts when the voltage is below 50 volts, protecting maintenance personnel.

Applications

Safe access to the engine room when voltage absence is detected.

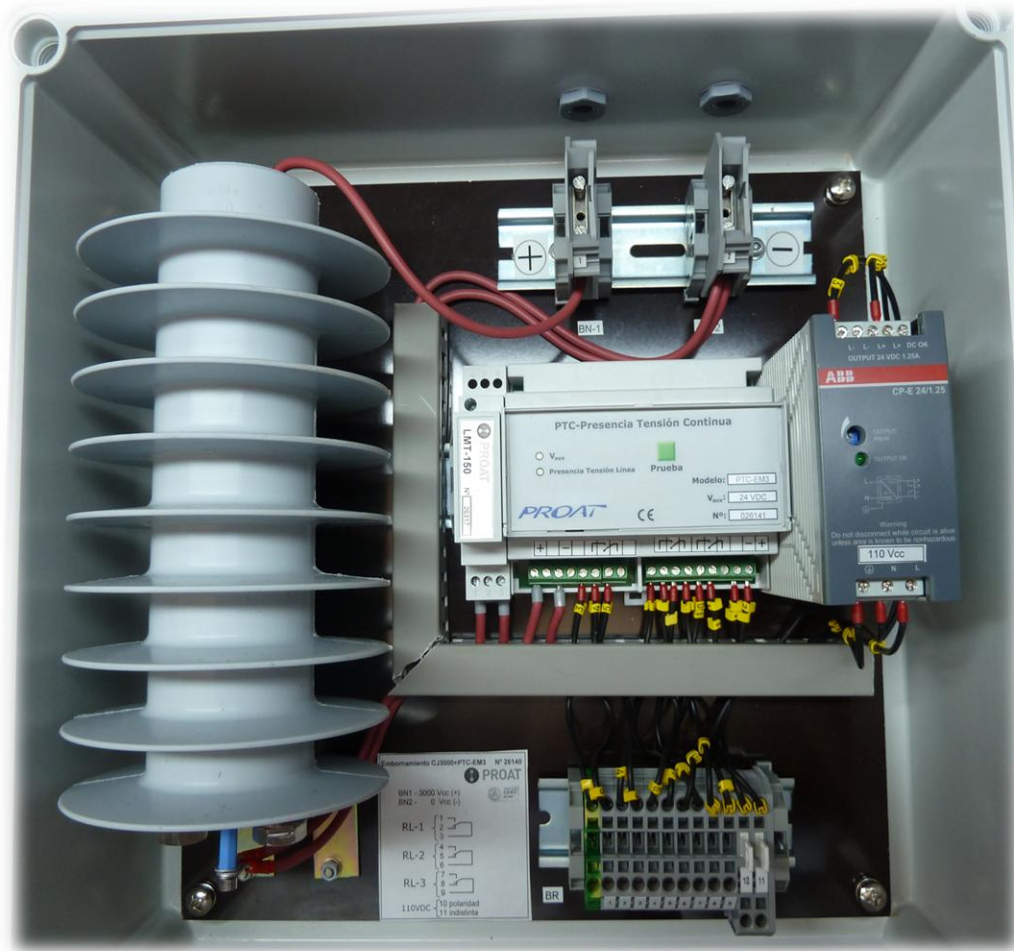

Model

Model	Catenary Voltage	Auxiliary Voltage
CJ3000+PTC-EM3	3,3 kV _{DC}	24 V _{DC}